

UVMY1000 series under hydrant shut-off valve



01 UVMY1000 under hydrant shut-off valve

The Meggitt Under Hydrant Valve is one of the most essential parts of a Hydrant System.


Should the isolation feature in a hydrant valve become in-operative, a servicing valve offers immediate local shutdown. This allows for removal or repair of the hydrant and alleviates the need to shut down the hydrant system either fully or partially.

In addition, the valve provides instant automatic shutdown in the event of fire. This emergency closure feature is triggered by a 93c = 199.4f fusible link.

02 Key Features

- ATEX and PED certified
- Choice of carbon or stainless steel bodies
- All valve components are manufactured in stainless steel
- Fire safe to API 6FA
- Available in three body lengths and four flange configurations
- Compact design minimum face to face dimension of only 124.50 mm
- Operates as Emergency Shut-off Valve

03 Key Specifications & Dimensions

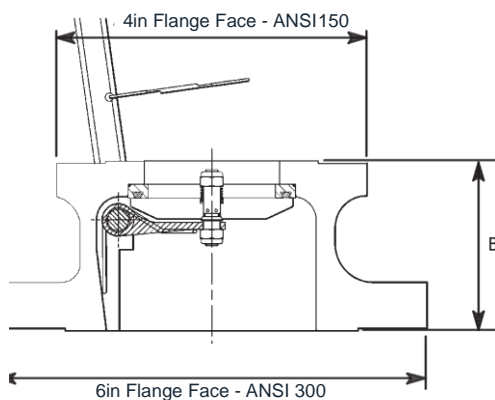

Maximum working pressure	275 psi
Test pressure	540 psi
Maximum working temperature	70 °C= 158 °F
Minimum working temperature	Carbon steel -29 °C = -84.2 °F
Gross weigh	28kg

The units are available in two standard configurations

- "UVMY1011C"- Carbon Steel Body

UVMY1000 under hydrant shut-off valve

03 Key Specifications & Dimensions


Other "special builds" are available and can be ordered by referring to the table below:

UVMY10 1 1 C/S

NUMBER	LENGTH (B)
1	124.50
2	139.70
3	152.40

VALVE BODY (CARBON STEEL)

04 Operation

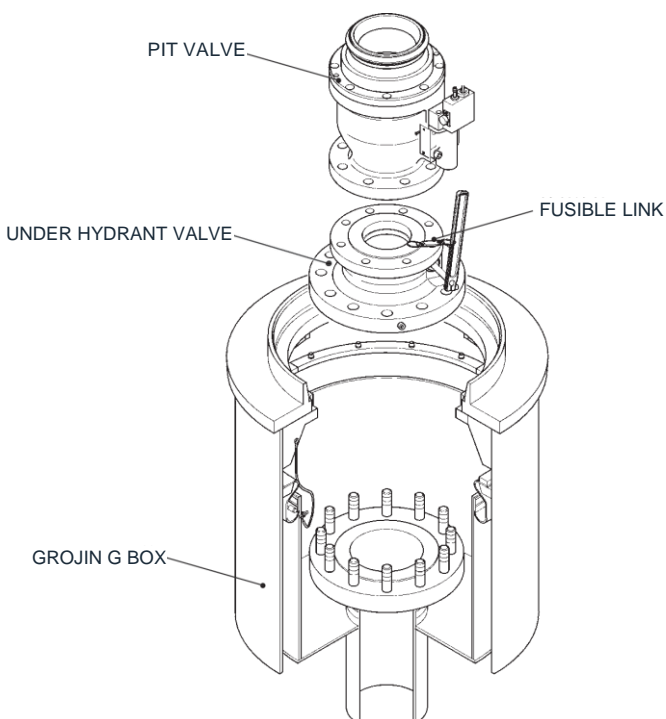

When fitted is operated by rotating the handle, thus opening the flap valve against a bespoke internal torsion spring. The design incorporates an automatic pressure equalisation feature, allowing the valve to be opened easily even when the hydrant is pressurised.

The valve is held open using a chain and fusible link arrangement.

To close the valve, the chain is simply uncoupled and the handle rotated until the flap meets its seat.

In the event of fire, the fusible link will fail and the valve will shut automatically

* Further Technical Information INCLUDING FULL SPARE PARTS LISTING may be obtained from our Technical Publications Department